


## Installation of Rowing Frame & Sliding Seat for PaddleSki


### Parts:

- (1) Predrilled Plastic board for Rowing Frame
- (2) Sliding Seat with cushion (not shown)
- (3) Rowing Arm
- (4) Pre-drilled Plastic Strip
- (5) 2 Predrilled Aluminum bars

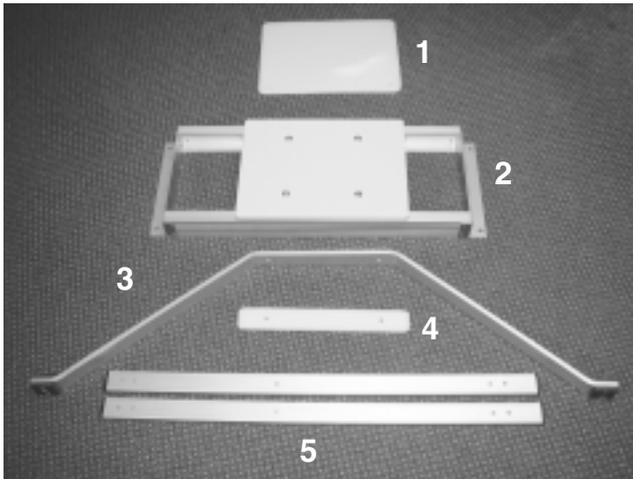


### Hardware:

- (a) 4 large knurled nuts
- (b) 4 large washers
- (c) 4 small washers
- (d) 2 hex head bolts 2-1/2"
- (e) 2 hex head bolts 2"
- (f) 2 Phillips head bolts 1-1/2"
- (g) 2 small knurled nuts

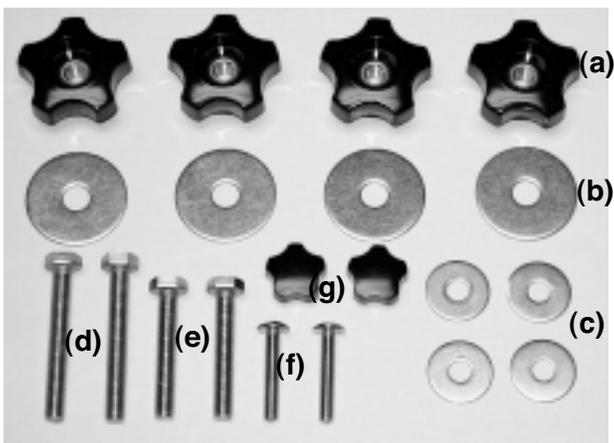

### Pre-Assembly:


Lay the two aluminum bars parallel to each other. Place the rowing arm and the plastic strip under the parallel aluminum bars and insert the hex head bolts (d) & (e) as shown. Shorter 1-1/2" bolts are used for the rowing arm. Use 2 small washers (c) for inserting the large hex head bolts through the plastic strip.

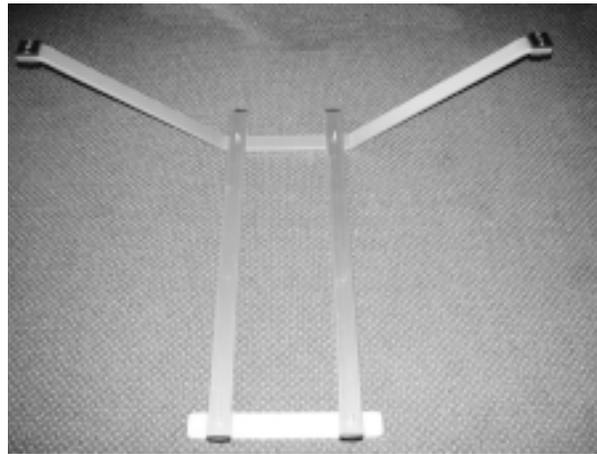

The above pre-assembled frame can be used for Rowing Frame or Sliding Seat configurations as below:

### A) Rowing Frame Configuration

Place the predrilled plastic board on the assembled frame as shown below. Now secure the whole Rowing Frame with 4 large knurled nuts (a), 4 large washers (b), 2 Phillips head bolts (f), 2 small washers (c) and 2 small knurled nuts (g) as shown.

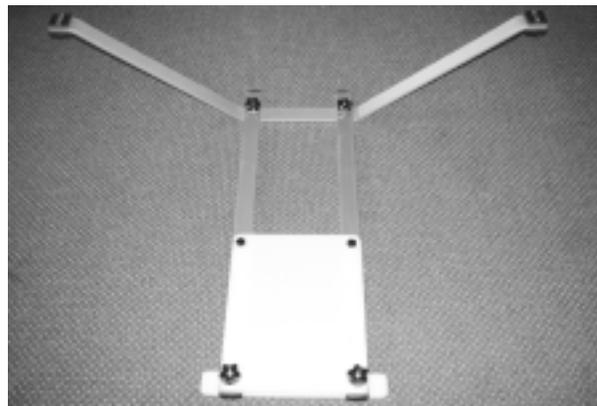


Now place assembled the rowing frame on your paddleski between the middle and the aft yoke. The rowing arm should lie towards the stern of the paddleski. The rowing frame should touch the middle yoke to prevent movement of the frame during rowing. Place a DKS Seat over the board for comfort and secure it to the d-rings on the boat. If your PaddleSki did not come with a DKS seat, you may use a Boat Cushion (not included) or any other seat cushion for comfort. Loop the included foot strap around the bolts of the aft yoke to lock your feet while rowing. Fully assembled rowing frame looks like this.



Instructions on how to attach the oars to the rowing arm is explained in the instructions for the Sliding Seat.

## **B) Sliding Seat Configuration**

Place the sliding seat on the preassembled frame. Then secure the sliding seat to the preassembled frame with 4 large black knurled nuts (a) and 4 large washers (b) as shown below. Attach the sliding seat cushion to the the sliding board for comfort during rowing.

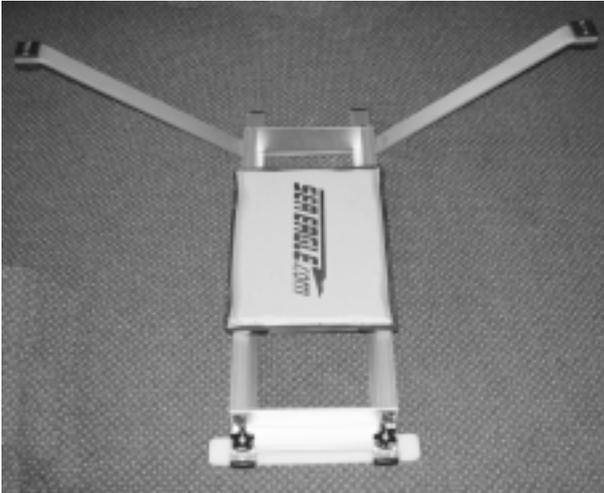

Place the assembled Sliding Seat on your PaddleSki between the middle and the aft yoke. The rowing arm should lie towards the stern. The assembled sliding seat must touch the middle yoke as shown to prevent movement of the frame while rowing. Loop the included foot strap around the bolts of the aft yoke to lock your feet while rowing.



Now snap the collapsible oars together, attach the oarlock pins with bolts and wing nuts. Now drop the oarlock pins in the fittings on the two end of the rowing arm as shown.



Fully assembled Sliding Seat configuration looks like this:



**SEA EAGLE.com**

19 North Columbia Street, Suite 1  
Port Jefferson, NY 11777

e-mail: [staff@SeaEagle.com](mailto:staff@SeaEagle.com)  
Ph: (800) 748-8066